HCF ADMIN. (MEDIUM) - PHONE ROOM (R)

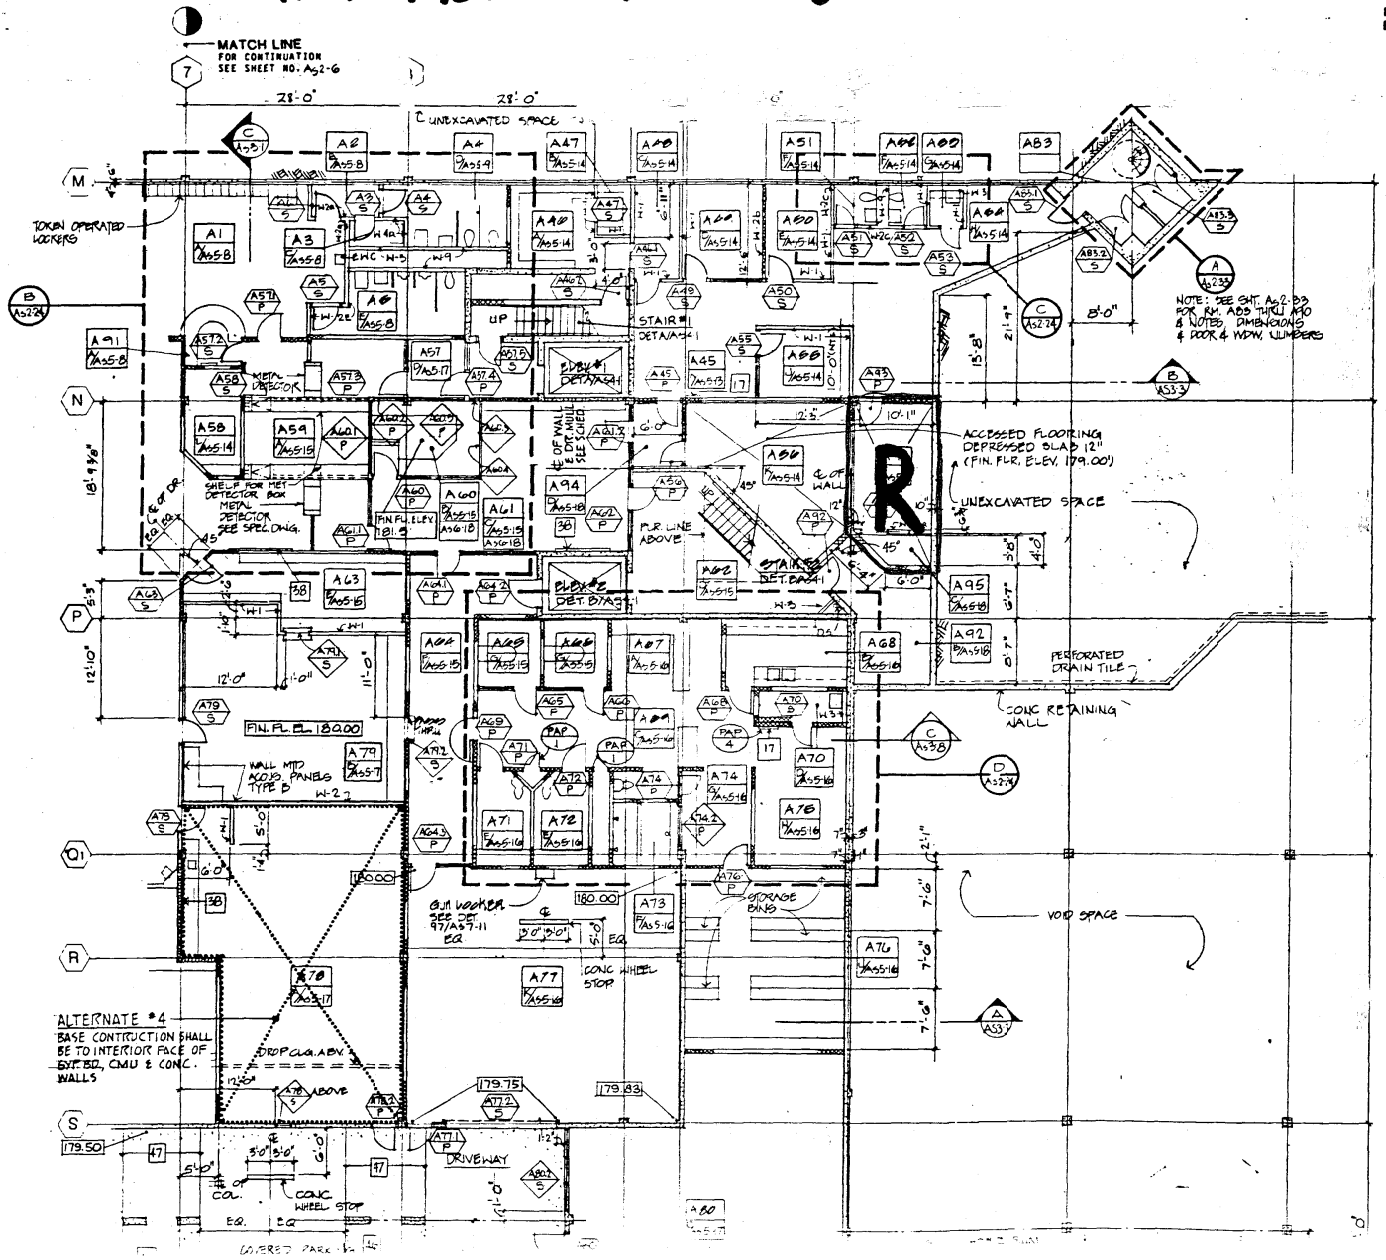

KEY TO INTERIOR ELEVATIONS

KEY PLAN

ROOM MATERIAL CODE LIST

	FLOOR / BASE		WALL / WAINSCOT		CEILING		
A	V.A. TILE/VINYL	A	GYP. BD.	1. CER TILE 2. Q.T. 3. NONE	A	GYP. BD.	1. SCL LAYER 2. DBL LAYER
B	CER. TILE/BAME	B	CMU	1. CER TILE 2. Q.T. 3. NONE	B	ACOUS. TILE	1. SUSPENDED 2. OVER GYP. BD.
C	Q.T./BAME	C	CONC.	1. CER TILE 2. Q.T. 3. NONE	C	CEM. PLAS.	
D	CONCRETE	D	CERAMIC TILE		D	CONCRETE	
E	CARPET/VINYL	E	CEM. PLAS.	1. CER. TILE 2. Q.T. 3. NONE	E	SPRAY ACOUS.	
F	SHT. VINYL/VINYL	F	SPRAY ACOUS.		F		
G	WOOD	G			G		

KEY NOTES

2	BENCH, SEE DET. # A/A56-17
3	BUILT UP ROOFING OVER RIGID INSULATION
6	CHALKBOARD
7	6" CMU
8	8" CMU
9	CONCRETE CURB, SEE DET. # M/A56-12
10	CONCRETE PLANTER
14	EXPANSION JOINT SEE DET. 7A/A56-12
17	FIRE HOSE CABINET
18	FURRED PIPE SPACE
21	HIGH POINT OF ROOF SLAB
22	KITCHEN EQUIPMENT, SEE KITCHEN DWG.
23	MECHANICAL EQUIPMENT PLATFORM
25	PIPE HANDRAIL, SEE DET. # D&E/A54-5
26	PIPE GUARDRAIL, SEE DET. #G/A54-5
28	POWER ROOF VENTILATOR SEE DET. #
29	ROOF DRAIN, SEE DET. # K/A56-10
30	ROOF OVERFLOW DRAIN, SEE DET. FL/A56-10
38	TACKBOARD
39	TOILET PARTITION
40	TOP OF PARAPET
41	TOP OF ROOF SLAB
42	VAPOR RELIEF VENT
45	WALL AS SCHEDULED
46	SLOPE
47	CONTROL JOINT

ALTERNATE # 4

NOTES:

- ( ) DENOTES A REMARK. SEE REMARKS COLUMN AND FINISH SCHEDULE REMARKS LIST. ORDER OF NUMBERS IN REMARKS COLUMN IS AS THEY OCCUR FROM LEFT TO RIGHT IN SCHEDULE.
- FOR MATERIAL EXPLANATIONS SEE "ROOM MATERIAL CODE LIST."
- FOR DESCRIPTION OF FINISHES SEE FOLLOWING SPEC SECTIONS:

PREFIX: SECTION:

"P"	-	09900, PAINTING
"P"	-	09200, PLASTER
"C"	-	03345, CONCRETE
"PC"	-	03450, PRE-CAST
"R"	-	09650, RESILIENT FL.
"CP"	-	09680, CARPET
"CT"	-	09310, CERAMIC TILE
"W"	-	09950, WALLCOVERING
"PL"	-	08220, PLASTIC LAM.
"A"	-	09510, ACOUST. CEIL.

ROOM NUMBER